



BOND SURE
YOUR PARTNER IN QUALITY

PRODUCTS
CATALOGUE
OF CONSTRUCTION
CHEMICALS

Your Partner in
Quality



Excellent
bonding



Easy
workability



Durability



Quick
jointing

Wide Range Of Interior And Exterior Solutions



Index

Adhesive Series

BS SILVER 101	01
BS GOLD 201	02
BS PLATINIUM 301	03
BS MARBLE ADHESIVE 401	04
BS EPOXY GROUT	05
BS CEMENT GROUT	06
BS V-FIX	07
BS TILE CLEAN	08
BS TILE SPACER	09
BS BLOCK -FIX	10
BS RICH BOND S & T PRIMER	11



Waterproofing Series


BS NANO BOND+	13
BS SBR 50	14
BS WATERBLOCK B-2	15
BS BOND COAT	16
BS CRACK FILL PASTE	17

Paint Series

B44 DISTMBER	19
PRIMER B4	20
BONDSURE WALL TEXTURE	21
BS WALL PUTTY	22



Premium Solid Tiles Adhesive Series

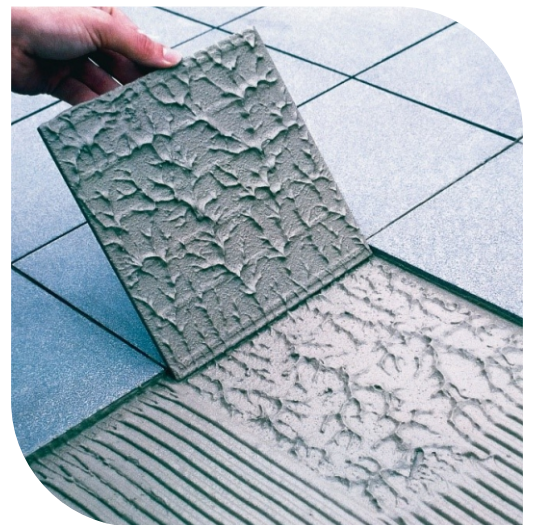



BS SILVER 101


Adhesive for floor & wall tiles fixing.

Area Of Application


BS SILVER 101 IS A GENERAL PURPOSE POLYMER MODIFIED CEMENTITIOUS GREY COLOURED TILE ADHESIVE TO FIX POROSITY CERAMIC TILES ON INTERNAL FLOOR AND WALL IS READY TO MINGLE COMPLAINANT TILE ADHESIVE.

Benefits

- READY TO USE
- BETTER POT LIFE
- POLYMER MODIFIED ADHESIVE
- APPLICATOR FREINDLY
- BETTER POT LIFE
- CLASS



**NEW TILING IN
INTERNAL AREA**



**VITRIFIED TILES ON THE FLOOR
& WALL UP TO 2*2 SIZE**

Colour	Coverage	Pack Size	Shelf Life	Pot Life	Adjustable Time	Use Surface	Grade
GREY	ITS COVER AN AREA OF APPROX 30 TO 35 SQ/FT PER BAG FOR 5 MM THICKNESS	20 KG	12 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITIONS	1 HOUR 30 MIN	10 MIN	24 HOUR SHEAR ADHESION DRY (24 HOUR) >4.95 KN	C2TE GRADE





BS GOLD 201

Adhesive for tile on tile and vertical wall application.

Area Of Application

BS GOLD 201 IS A GENERAL PURPOSE POLYMER MODIFIED CEMENTITIOUS GREY COLOUR TILE ADHESIVE TO USE TILE ONLINE APPLICATION AND VERTICAL WALL TILE FIXING APPLICATION.

Benefits

- READY TO USE
- BETTER POT LIFE
- HIGH STRENGTH POLYMER MODIFIED ADHESIVE
- APPLICATOR FREINDLY
- BETTER POT LIFE
- CLASS

○ **VERTICAL TILES
FIXING UP TO 4*2**

○ **FOR INTERNAL & EXTERNAL AREA**

○ **MARBLE FRAMING IN
INTERNAL SIDE**

Colour	Coverage	Pack Size	Shelf Life	Pot Life	Adjustable Time	Use Surface	Grade
GREY	ITS COVER AN AREA OF APPROX 30 TO 35 SQ/FT PER BAG FOR 5 MM THICKNESS	20 KG	12 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITIONS	1 HOUR 30 MIN	10 MIN	24 HOUR SHEAR ADHESION DRY (24 HOUR) >4.95 KN	C2TES1 GRADE



www.bondsure.in



BS PLATINUM 301


Adhesive for tile on tile, vertical wall application, marble Framing, natural stone in interior and exterior cladding.

Area Of Application


BS PLATINUM 301 IS A HIGH GRADE POLYMER MODIFIED CEMENTITIOUS GREY COLOUR TILE ADHESIVE TO USE TILE ON TILE APPLICATION AND VERTICAL WALL TILE FIXING AND STONE AND MARBLE FIXING APPLICATION.

Benefits


- READY TO USE
- BETTER POT LIFE
- HIGH STRENGTH POLYMER MODIFIED ADHESIVE
- APPLICATOR FREINDLY
- BEST COVERAGE
- BEST RESULT AFTER APPLICATION



NATURAL STONE FIXING



FOR INTERNAL & EXTERNAL AREA



MARBLE FRAMING IN INTERIOR & EXTERIOR SIDE

Colour	Coverage	Pack Size	Shelf Life	Pot Life	Adjustable Time	Use Surface	Grade
GREY	ITS COVER AN AREA OF APPROX 30 TO 35 SQ/FT PER BAG FOR 5 MM THICKNESS	20 KG	12 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITIONS	1 HOUR 30 MIN	10 MIN	24 HOUR SHEAR ADHESION DRY (24 HOUR) >5.4K	C2TES2 GRADE





BS MARBLE ADHESIVE 401


BS MARBLE ADHESIVE 401 is ultra premium water resistant.

Area Of Application


BS MARBLE ADHESIVE 401 IS A HIGHLY POLYMER MODIFIED CEMENTITIOUS WHITE COLOURED TILE ADHESIVE TO USE CERAMIC, GLASS MOSAIC AND STONE APPLICATION.

Benefits


- READY TO USE
- BETTER POT LIFE
- HIGH STRENGTH POLYMER MODIFIED ADHESIVE
- APPLICATOR FREINDLY
- BEST COVERAGE
- BEST RESULT AFTER APPLICATION



**NATURAL
STONE FIXING**



FOR INTERNAL & EXTERNAL AREA



**MARBLE FRAMING IN
INTERIOR & EXTERIOR SIDE**

Colour	Coverage	Pack Size	Shelf Life	Pot Life	Adjustable Time	Use Surface	Grade
WHITE	ITS COVER AN AREA OF APPROX 30 TO 35 SQ/FT PER BAG FOR 5 MM THICKNESS	20 KG	12 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITIONS	1 HOUR 30 MIN	15 MIN	24 HOUR SHEAR ADHESION DRY (24 HOUR) >5.4K	C2TES2 GRADE



www.bondsure.in



BS EPOXY GROUT

Area Of Application

BS EPOXY GROUT IS THREE COMPONENT EPOXY BASED CERAMIC AND TILES JOINT FILLER. BS EPOXY GROUT HYGIENIC, HARDWEARING, IMPERVIOUS EPOXY RESIN BASED GROUT.

Benefits

- EASY TO APPLICATION
- HIGH PERFORMERCE
- CRACK RESISTANCE
- NON-CONTRACTING
- STAIN & BACTERIAL RESISTANT
- WATERPROOF, FROST PROOF

○ **FOR INTERNAL & EXTERNAL AREA OF TILE JOINT, STONE JOINT & GLASS MOSAIC JOINT**

○ **TILE JOINT UP TO 2 MM TO 20 MM**

Colour	Pack Size		Shelf Life
AVAILABLE MORE 45 COLOUR ALSO AVAILABLE IN GLITTER COLOUR	1 KG (RESIN 180 GRAM + HARDNER 90 GRAM + FILLER 730 GRAM)	5 KG (RESIN 900 GRAM + HARDENER 350 GRAM + FILLER 3.650 KG)	12 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITIONS

NOTE: BOND SURE EPOXY GROUT ALSO AVAILABLE TWO PART



BS CEMENT GROUT

Area Of Application

BS CEMENT GROUT SINGLE PART HIGH DEGREE OF HARDNESS, CALIBRATED SMOOTH FINISH THAT IS SUITABLE FOR HIGHLY RESISTANT GROUT FROM 1 MM TO 5 MM ON A HORIZONTAL SURFACE AND VERTICAL SURFACE .

Benefits

- EASY TO APPLICATION
- HIGH PERFORMERCE

Colour	Pack Size	Shelf Life
AVAILABLE IN 12 COLOUR	1 KG	12 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITIONS



www.bondsure.in




BS V-FIX

Area Of Application

BS V-FIX IS EPOXY ADHESIVE TWO COMPONENT HIGH PERFORMANCE, HIGH BONDING ADHESIVE FOR FIXING ALL TYPE OF TILES AND STONE AND GLASS MOSAIC ON METAL AND WOOD SURFACE.

Benefits

- TWO COMPOUNDS JUST MIX AND USE NON SHRINK MATERIAL
- LIFETIME BOND WITH VARIOUS SURFACE ON METAL AND PLYWOOD



FOR INTERNAL AND EXTERNAL USE OF GLASS MOSAIC & LARGE TILES

Pack Size	Shelf Life
1 KG (RESIN 500 GRAMS + HARDENER 500 GRAM)	6 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITIONS



BS TILE CLEAN

Area Of Application


BS TILE CLEAN IS A POWERFUL CERAMIC SURFACE CLEANER AND STAIN REMOVER, IT SPECIALLY FORMULATE FOR REMOVE TOUGH STAINS.

Benefits

- NO EFFECT ON CERAMIC & GLASS SURFACE
- EASY TO APPLY
- CLEAN ALL TYPES OF TILE SURFACE
- ECONOMICAL PRICE



**CLEAN CERAMIC SURFACE
AFTER CIVIL WORK**



**PRE CLEANIG OF TILE JOINT
BEFORE GROUTING**

Pack Size	Shelf Life
1 LTR	12 MONTH FROM PACKING DATE OF MANUFACTURING



www.bondsure.in



BS TILE SPACER

Description

BS TILE SPACER TILE SPACER JOINT SPACERS ARE DESIGNED FOR INSTALLATIONS OF CERAMIC AND STONE TILES OF VARIOUS SIZES, THICKNESSES AND FORMATS. THEY ARE DESIGNED TO HELP USERS DURING TILE INSTALLATION, TO HELP SET UNIFORM GROUT JOINTS. **BS TILE SPACER** TILE SPACER JOINT SPACERS ARE AVAILABLE IN VARIOUS SIZES AND SHAPES TO SUIT ANY TYPE OF CERAMIC AND STONE TILE OR INSTALLATION PATTERN.

Benefits

- SEVERAL THICKNESSES FOR A VARIETY OF JOINT WIDTHS
- DIFFERENT MODELS TO ADAPT TO VARIOUS TILING PATTERNS AND FILE FORMATS

Coverage

Pack Size

BS Tile Spacer X-shaped Spacers For Straight Patterns Of Joint Widths Up To 1/4" (6 Mm)

Case of 30 bags
200 spacers per bag.



BS BLOCK-FIX

Its use for masonry wall preparation by joining all types of AAC block , fly ash bricks

Area Of Application

BS BLOCK FIX MORTAR IS VERSATILE THIN JOINTING ADHESIVE FOR THIN BED APPLICATION. THIS MORTAR CUM ADHESIVE IS SPECIALLY DESIGNED TO PROVIDE STRONGER BONDING WITH BLOCK WITH OPTIMUM ADHESIVE STRENGTH

Benefits

- CONSISTENT QUALITY
- NON SHRINK & CRACKS AT JOINT
- TIME SAVER
- REPLACEMENT FOR CONVENTIONAL CEMENT & SAND MORTAR
- HIGH STRENGTH MATERIAL

Colour	Pack Size	Shelf Life	Pot Life	Adjustable Time	Use Surface	Compressive Streght	Water Ratio
GREY	40 KG	12 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITION FROM MANUFACTURING DATE	1 HOUR	10 MIN	48 HOUR	6-7 N/MM2	25% BY WEIGHT OF CHEMICAL POWDER



www.bondsure.in



BS RICH BOND S&T

BS TILE PRIMER is single component ready to use material for back tile & Stone. RICH BOND binder between tiles, marble, granite glue or Adhesive.

Area Of Application

INTERIOR AND EXTERIOR APPLICATION FOR FIXING OR LAYING LARGE SIZE TILES ITALIAN MARBLE, GRANITE, STONE ON WALL, CLADDING OR FRAMING. USE OVER CONCRETE CEMENT, PLASTER SURFACE TO FIX LARGE SIZE TILES MARBLE GRANITE, STONE.

Benefits

- BEST QUALITY MATERIAL
- WATER RESISTANT LAYER
- WAITING PERIOD TILL TOUCH DRY MIGHT BE 10 MINUTE
- ZERO WASTAGE, NON TOXIC
- UNLIKE OTHER WAITING TIME 24 HOUR
- SAVE TIME

Pack Size	Shelf Life
1 KG 5KG	12 MONTH UNOPENED BAGS UNDER NORMAL WAREHOUSE CONDITION FROM MANUFACTURING DATE

Best In Class

Waterproofing

Solutions

for New and

Old Construction





BS NANO BOND+

Area Of Application

BS NANO BOND+ IS READY TO USE SINGLE COMPACT SILICONE BASED INVISIBLE COATING AND BEST QUALITY WATER REPELLENT. ROOF, SLAB AREA, BALCONY, VERTICAL WALLS, BRICK, EXPOSED WORK AND WATER BODY AREA.

How to use

- APPLIED SURFACE MUST BE CLEAN AND FREE FROM DUST, OIL, GREASE AND LOOSE PRACTICAL.
- ALL CRACKS AND HOLES MUST BE REPAIR BEFORE APPLICATION.
- APPLIED SURFACE MUST BE PRE WETTED BY WATER ALLOW IT FOR TOUCH DRY.
- APPLY 1ST COAT BY BRUSH OR SPRAY AND ALLOW IT DRY FOR 3-4 HOUR AND THEN APPLY SECOND.

Pack Size

Covaraĝe

1 Ltr.

DEPEND ON
SURFACE
POROSITY



BS SBR 50

Repair RCC beam, column, slab & other waterproofing on new terrace, bathroom, balcony, chajja, sloping roof etc.

Area Of Application

SBR LATEX FOR INTERNAL REPAIRS & WATERPROOFING CHEMICAL IS SPECIALLY MADE STYRENE BUTADIENE CO-POLYMER LATEX LIQUID USE FOR WATERPROOFING AND REPAIRING OF CONCRETE AND PLASTER, AS BONDING PERFORMANCE PLASTER

Benefits

- USE FOR WATERPROOFING COAT
- HIGH STRENGTH WITH OLD & NEW CONCRETE
- PREVENT CRACKING
- MULTIPURPOSE USE

Pack Size	Apperance	Shelf Life	Type
1 ltr, 5 ltr, 20 ltr, 200 ltr	WHITE FREE FLOWING	12 MONTH OF MANUFACTURING DATE	STYRENE BUTADIENE RUBBER LATEX PH: 7.7 PH



www.bondsurre.in



BS WATERBLOCK B-2

Area Of Application

BS WATERBLOCK B-2 IS TWO COMPONENT HIGHLY ACRYLIC POLYMER HIGH PERFORMANCE WATERPROOFING COATING FOR WET AREAS. ITS ALSO COVER SMALL CRACK AND GIVE EXCELLENT WATERPROOFING.

Benefits

- HIGHLY WATERPROOFING MATERIAL
- READY TO MIX
- ELASTOMATIC COAT
- EXCELLENT BONDING WITH CONCRETE & MASONRY SURFACE
- CRACK BRIDGING ABILITY

Pack Size	Colour	Shelf Life	Technical Specification
15 KG (5 KG LIQUID + 10 KG POWDER)	GREY & WHITE	12 MONTH OF MANUFACTURING DATE	MIX RATION - 1 LIQUID : 2 POWDER ELONGATION AT BREAK : 80 % CRACK BRIDGING : NO CRACK UPTO 1.5 MM TOUCH FREE TIME : 4 HOUR



BS BOND COAT

Area Of Application

BS BOND COAT IS AN AROMATIC FLEXIBLE SINGLE PACK WATERPROOFING MEMBRANE MATERIAL MADE FROM PURE ACRYLIC POLYMER FOR WATERPROOFING COATING ON TERRACE AND EXTERNAL WALL . IS THICK MEMBRANE PROVIDE EXCELLENT CRACK BRIDGING ABILITY AND ULTIMATE WATERPROOFING ON TILES AND CHINA MOSAIC.

Benefits

- READY TO USE MATERIAL
- HIGHLY WATERPROOFING MATERIAL
- ITS WASHABLE & SCRUB RESISTANT
- BEING ELASTIC IN NATURE IT ALLOW MINOR STRUCTURAL MOVEMENT
- ANTI CARBONATION PROPERTIES
- WEATHER AND UV RESISTANCE
- CRACK BRIDGING ABILITY

Pack Size	Colour	Shelf Life	Technical Specification
5 ltr, 20 ltr	WHITE & BLACK	12 MONTH OF MANUFACTURING DATE	ELONGATION BREAK : >400 % CRACK BRIDGING : NO CRACK UP TO 1.5 MM TOUCH FREE TIME : 6 HOURS TENSILE STRENGTH : 1.5 MM



www.bondsurre.in



BS CRACK-FX PASTE

Area Of Application


BOND SURE CRACK-FX PASTE READY TO USE ACYLIC BASE CRACK FILLING MATERIAL. SINGLE COMPOUND FOR BOTH SIDE INTERIOR AND EXTERIOR SURFACE ITS ENSURES UNMATCHED CRACK ABILITY FOR PLASTER CRACKS OF UP TO 5MM.

Benefits

- READY TO USE
- WATER RESISTANT LAYER
- EASILY OVER COATED BY EMULSION PAINT
- SETTING TIME 3 HOUR
- ANY SURFACE BONDING (PLASTER , POP, JOINT OF WINDOW)

Pack Size	Colour	Shelf Life	Coverage	Technical Specification
1KG	WHITE	12 MONTH OF MANUFACTURING DATE	1 K G P A C K COVERS APPROX 20-22 RUNNING 4 MM DEPTH	APPEARANCE: WHITE PASTE ELONGATION : 100-120 % TOUCH FREE TIME : 6 HOUR

Get Smile on your House Walls

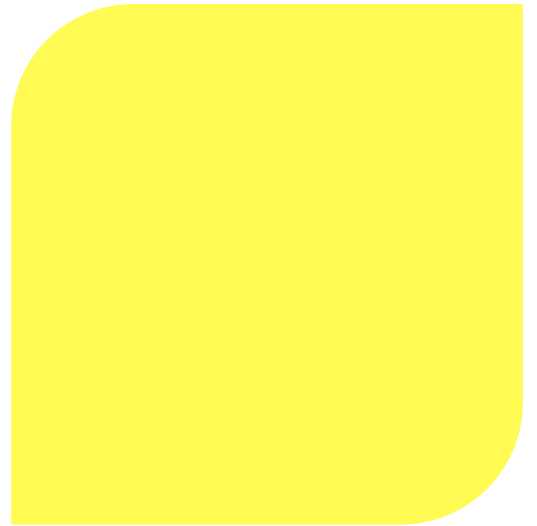



B44 DISTEMPER

Area Of Application

B44 DISTEMPER IS PREMIUM WATER BASED DISTEMPER FOR ALL NORMAL MASONRY INTERIOR SURFACES. IT PROVIDES SMOOTH AND DURABLE MATT FINISH ON
APPLICATIONS: INTERIOR WALLS AND CEILINGS

Advantages

EXCELLENT SMOOTH FINISH SUPERIOR COLOUR DELIVERY WITH BRIGHTER AND CLEANER SHADES FASTER APPLICATION DUE TO IMPROVED BUSHABILITY COMPATIBLE WITH MOST SHADES. GOOD WASHABILITY.

Pack Size	Coverage	Finish
1kg, 5kg, 10kg, 20kg the applied surfaces.	80-90 sq.ft/kg	Matt





BS PRIMER B4

Area Of Application

BS PRIMER B4 READY TO USE PLASTERED SURFACES, ASBESTOS SHEETS, CONCRETE, BRICK WORK, WALLS.

Description

IT IS **BS PRIMER B4** IS SUITABLE FOR UNDERCOAT FOR WALLS, ASBESTOS, CONCRETE, CEMENT BEFORE FINISH COAT. IT GIVES A SUITABLE SUBSTRATE FOR WALL FINISHING. IT CAN BE THINNED WITH POTABLE WATER TO ACHIEVE APPLICABLE CONSISTENCY. IT PROVIDES A FEW SPECIAL FEATURES TO SUBSTRATE AS EASY BRUSHING, ALKALI RESISTANT, EXCELLENT COVERING, QUICK DRYING AND BETTER SEALING POWER.

Benefits

- EXCELLENT ADHESION TO SUBSTRATES
- SEALS DRY POROUS SURFACES
- EASE OF APPLICATION
- GOOD HARDNESS
- GOOD RESISTANCE TO ALKALI

Pack Size


1 ltr,
4 ltr,
10 ltr,
20 ltr

Coverage

100-120 sq./ltr**
(Single coat - May vary due to surface imperfections)



www.bondsures.in

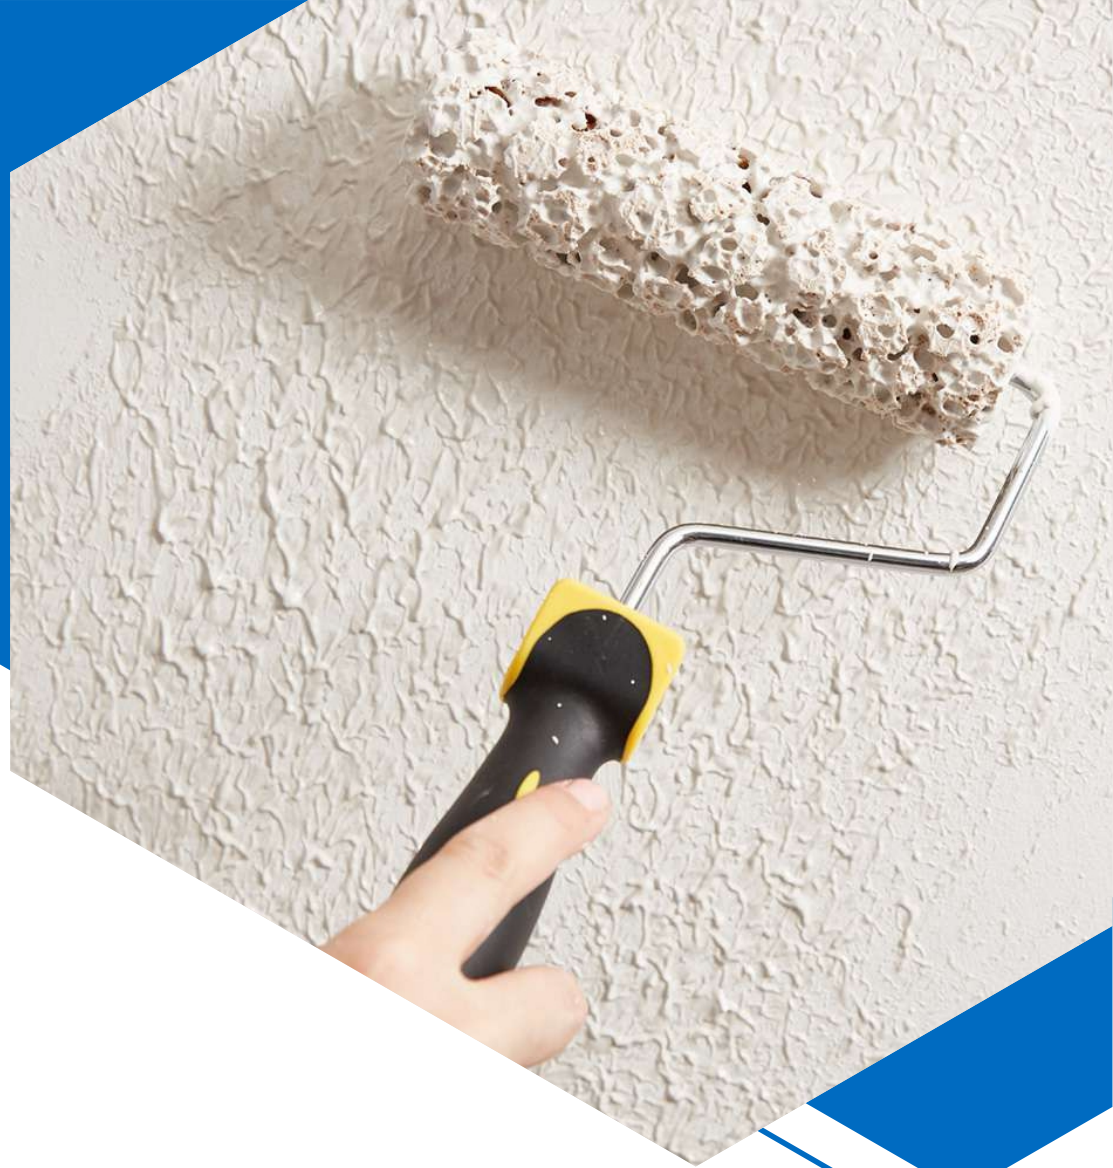

BONDSURE WALL TEXTURE

Area Of Application

AN INNOVATIVE WAY OF DOING UP YOUR WALL IS TO GIVE IT A TROWEL PATTERN. BS WALL TEXTURE IS A MODIFIED ACRYLIC & SILICA BASED PRODUCT THAT CAN USED TO GIVE A WIDE RANGE OF INNOVATIVE TROWEL BASED PATTERNS FOR INTERIOR AND EXTERIOR WALL SURFACES. BS WALL TEXTURE CONTAINS HIGH PERFORMANCE BONDING MATERIAL TOGETHER WITH EXCELLENT WATER RESISTANT PROPERTIES WHICH HELPS DECORATE THE WALL AS WELL AS PROTECT BOTH INTERIOR AND EXTERIOR WALL SURFACES.

Advantages

- **HIDES CRACKS** - It can hide uneven surface and fine cracks on it
- **PROTECTS PLASTER** - It protects plastered walls from windy rainfall
- **COMPATIBILITY** - It is highly compatible with plaster and concrete wall surfaces
- **UV RESISTANT** - This product has excellent UV resistance and adhesion strength
- **LONG-LASTING** - The tough textured finish lasts for longer than ordinary plaster ensuring low maintenance
- **ANTI-FUNGAL** - It resists from both fungus and algal growth when applied together with recommended top coat
- **VALUE FOR MONEY** - Provides best value for money

Colour	Pack Size	Coverage
WHITE	25KG	75 sq.ft/kg Per Bag at 2 mm thickness

Type of Textures

- RUSTIK
- DHOLPUR
- SPRAY COAT
- ROLLER COAT



BS WALL PUTTY

Area Of Application

INTERNAL AND EXTERNAL WALLS AND CEILINGS

Description

A BLEND OF WHITE CEMENT, POLYMERS AND MINERALS, BS WALL PUTTY PROTECTS AND SMOOTHEN WALLS AND IS EFFECTIVE ON ALL TYPES OF CEMENTITIOUS SURFACES. IT IS PURE WHITE IN COLOUR AND HAS STRONG ADHESIVE PROPERTIES WHICH ENSURE A STRONG BOND BETWEEN THE BASE AND THE PAINT MAKING IT AN IDEAL SURFACE FOR ALL INTERIOR AND EXTERIOR WALLS.

Advantages

- GREATER PROTECTION
- ULTRA SMOOTH FINISH
- QUICK AND EASY APPLICATION
- ECONOMICAL
- GREATER RESISTANCE TO WATER
- PERFECT BONDING WITH THE SUBSTRATE

Pack Size

20 kg,
40 kg
bags

Coverage

15 sq.ft/kg at 2 mm thickness (May vary due to surface imperfections)



www.bondsure.in



Others Products

BONDSURE GROUT B-40	24
BONDSURE WHITE CEMENT	25
BOND MIX MICRO CONCRETE	26
BS RUST CONVERTER	26

FLIP PAGE



BONDSURE GROUT B-40

Area Of Application

FREE FLOW, HIGH STRENGTH, NON-SHRINK, CEMENTITIOUS PRECISION **BS GROUT B-40** USED FOR PRECISION GROUTING WHERE IT IS ESSENTIAL TO WITHSTAND STATIC AND DYNAMIC LOADS. TYPICAL APPLICATIONS WOULD BE THE GROUTING OF BASE PLATES OF TURBINES, COMPRESSORS, BOILER FEED PUMPS ETC., IT CAN ALSO BE USED FOR ANCHORING A WIDE RANGE OF FIXINGS. THESE INCLUDE MASTS, ANCHOR BOLTS AND FENCE POSTS.

Advantages

- Gaseous expansion system compensates for shrinkage and settlement in the plastic state.
- No metallic iron content to cause staining.
- Pre-packed material overcomes onsite batching variations.
- Develops high early strength without the use of chlorides.
- High ultimate strength ensure the durability of the hardened grout.
- Free flow ensures high level of contact with load bearing area.

Note	Pack Size	Shelf Life
Also available in quality of bond sure grout B-40 non shrink grout	25KG	6 months if kept in a dry store in sealed bags.



www.bondsurre.in

BONDSURE WHITE CEMENT

Description

BOND SURE WHITE CEMENT IS REINFORCED WITH HIGH QUALITY WHITE PORTLAND CEMENT AND POLYMER COMPOUNDS BY THE ADVANCED TECHNOLOGY WHICH IS CHARACTERIZED BY HIGH WHITENESS, HIGH STRENGTH, EXCELLENT DEGREE OF FINENESS, GOOD ADHESION, HIGH CONSTRUCTION PERFORMANCE, HIGH CONSISTENCY, ETC.

Area Of Application

1. DESIGNER FLOORING: YOU CAN PUT YOUR PERSONAL TOUCH ON ALMOST ANY PART OF YOUR HOUSE, BE IT INTERIORS OR EXTERIORS, USING BOND SURE DECORATIVE WHITE CEMENT AS YOUR MAGIC TOOL SO GO ON AND BE AMAZED. ENVISIONING YOUR DREAM HOME HAS NEVER BEEN SO EASY.

Terrazzo Flooring

BOND SURE WHITE CEMENT HAS DURABILITY, BEAUTY AND LOW COST. IT IS PREPARED ON SITE CREATING AN ALMOST SEAMLESS FLOOR FINISH THAT IS SECOND TO NONE IN TERMS OF QUALITY AND MAINTENANCE. THERE ARE NO GROUT JOINTS TO CLEAN, JUST A COMPLETELY FLAT SURFACE. IT IS POPULAR FOR RESIDENTIAL & OFFICE BUILDINGS. IT IS PREMIUM FLOORING FOR A COST LESS THAN THAT OF SOME IMPORTED MARBLES AND GRANITES. OTHER BENEFITS OF TERRAZZO FLOORING LAID BY USING BOND SURE DECORATIVE WHITE CEMENT ARE THE ENDLESS COLOR SCHEMES, DESIGN & PATTERN FLEXIBILITY THAT CAN BE MADE TO ACHIEVE EXACTLY THE EFFECT YOU DESIRE.

Architectural Uses

STRETCH YOUR IMAGINATION BEYOND JUST WALL AND FLOOR FINISHES WITH BOND SURE DECORATIVE WHITE CEMENT. THERE ARE MANY RECENT INNOVATIONS THAT HAVE BEEN MADE WITH BOND SURE DECORATIVE WHITE CEMENT. SOME OF THEM INCLUDE THE USE OF GRASS REINFORCED CONCRETE AND PRE-CAST PANELS WHICH HAVE REVOLUTIONIZED THE MODERN CONSTRUCTION AND DESIGN WORLD. OTHER AESTHETIC AND CREATIVE APPLICATIONS INCLUDE THE USE BOND SURE DECORATIVE WHITE CEMENT IN MAKING ANY LANDSCAPING OR ORNAMENTAL ARTICLE IMAGINABLE. READ ON, AND BE AMAZED!



Marble Flooring

THOUGH MARBLE STONE IS NATURALLY WHITE AND ELEGANT, IT'S ALSO TRANSLUCENT AND POROUS IN NATURE. IF MARBLE IS LAID ON A GREY CEMENT BASE, IT STARTS TO LOOK DULL AND GREY, LOSING ITS AESTHETIC CHARM. AN EFFECTIVE WAY TO PREVENT THIS IS TO LAY IT ON A THIN LAYER OF BOND SURE DECORATIVE WHITE CEMENT IN THE FORM OF SLURRY. THIS ACTS AS A WHITE SEPARATOR REFLECTING 100% LIGHT AND PREVENTING THE GREY CEMENT FROM PENETRATING THROUGH AND RUINING THE LOOK OF YOUR MARBLE.

Ornamental Uses

YOU CAN NOW EXPRESS YOUR CREATIVITY BY MAKING ANY LANDSCAPING OR ORNAMENTAL ARTICLE WITH BOND SURE DECORATIVE WHITE CEMENT THAT YOU CAN IMAGINE. BOND SURE DECORATIVE WHITE CEMENT HAS NOTABLE APPLICATIONS IN THE MOLDING OF SCULPTURES, MOTIFS, WATER FOUNTAINS, BENCHES ETC.

Pack Size

1 K g & 5 K g
Pouch, 20Kg &
50 Kg Moisture
resistant bags.

Advantages

- More Whiteness & Brightness
- Decorative & Economical
- Aesthetic Appeal
- Superior bonding with surface.
- Strength of adhesion to the base is distinctly improved



BOND MIX MICRO CONCRETE

Area Of Application

BOND MIX MICRO CONCRETE IS GREY CEMENTITIOUS DRY MIX POWDER-BASED PRODUCT. IT IS A COMPOSITION OF GREY CEMENT, GRADED SAND & ADDITIVES. IT HAS EXCELLENT FLOWABILITY, WORKABILITY DUE TO HIGHLY MODIFIED POLYMERS.

Pack Size

25kg

Coverage

Water addition - 3.5 ltrs. / 25 Kg bag, under no circumstances should part bags be used, or additional water be employed. Either of these two actions will adversely affect material performance.

Benefits

- PRE-PACKED, EASY TO USE, JUST ADDITION OF WATER AT SITE IS REQUIRED
- DEVELOPS HIGH INITIAL AND ULTIMATE FINAL STRENGTH
- SHRINKAGE CONTROL & FLOWABLE MORTAR HENCE IT DOES NOT REQUIRE ANY COMPACTION
- SELF-COMPACTING WITH GUARANTEED PERFORMANCE
- EXCELLENT COMPRESSIVE STRENGTH

BS RUST CONVERTER

Area Of Application

ENVIRONMENTALLY FRIENDLY DISPERSION-BASED **BS RUST CONVERTER**

CAN BE PAINTED OVER

CAN BE PAINTED OVER WITH ALL COMMERCIALY AVAILABLE TOP-COAT PAINT SYSTEMS AFTER 3 HOURS

CAN BE FILLED

ENVIRONMENTALLY FRIENDLY, AS DISPERSION-BASED RELIABLY STOPS THE CORROSION PROCESS AND PROVIDES AN OPTIMISED APPLICATION SURFACE FOR ADDITIONAL PAINT WORK. RUST CONVERTER PENETRATES INTO THE RUST, REACTS WITH THE RUST AND CONVERTS IRON OXIDE INTO A STABLE, INSOLUBLE, BLUE-BLACK, METAL-ORGANIC COMPLEX.

Instructions

- THE SURFACE MUST BE CLEAN, DRY AND FREE FROM GREASE
- MASK OFF SURFACES NOT TO BE TREATED
- REMOVE DISSOLVED RUST, PAINT AND DIRT WITH A WIRE BRUSH, SCRAPER ETC.
- APPLY A THIN, EVEN COAT WITH A BRUSH OR ROLLER AND PREVENT RUNS
- OBSERVE THE REACTION TIMES
- PAINT WITHIN 48 HOURS

Pack Size

1000ml

Shelf life

60 Months





WE ARE Committed MAKE IN India



www.bondsurre.in

BOND SURE CONSTRUCTION CHEMICALS

(An ISO 9001:2015 Certified Company)



Manufactured By:

SHREE JALIYAN BUILD CARE, Narol, Ahmedabad.

 info@bondsure.in

 www.bondsure.in



SCAN ME...
FOR COMPANY PROFILE

Follow us:     | www.bondsure.in